

## KENT KH265/110



The KH265/110 Fixed Height Gully is a 'Box Top' version of our KH215 family of square body gullies. The edge profile allows for ingress of concrete or resin under the turnout and also this area can be re-enforced with stainless box section or solid bar for very heavy duty applications.

They are designed for use primarily in Food/Beverage/Pharmaceutical factories. They are used in both light duty and very heavy duty trafficked areas (depending on the gratings chosen). The KH265/110 has a 25mm deep grating seat and so takes all Kent Mesh, Heelproof Mesh, Factory Ladder, Heelproof Ladder, plus our 3mm and 10mm perforated gratings can be modified to sit in the 25mm recess.

In most cases a 110mm or 160mm outlet is required, but this can easily be ordered with a 4"SCH10 or 6"SH10 outlet pipe. It is trapped as standard with the Kent Bell Trap.

### Features

- Grade 304 (1.4301) or 316 (1.4401) Stainless Steel to BS EN 10088
- Low Cost
- Strong
- Short lead time
- Usable in both heavy and light duty areas
- Suitable for internal factory drainage and external civil drainage projects

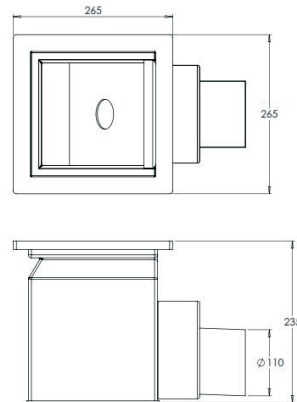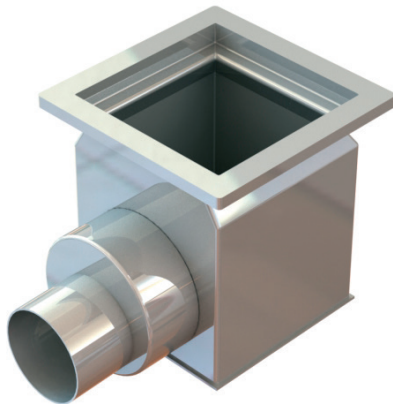

Product Code	Height	Width	Depth	Outlet	Swage	Flow Rate*
KH265/110	235	265	265	110	25	4.75 l/s
KH365/110	235	365	365	110	25	4.75 l/s
KH365/160	284	365	365	160	25	9.85 l/s

\* flow rate is also dependant on grating chosen

**Specify: Kent KH265/110 trapped industrial gully; 265mm x 265mm; grade 304 stainless steel; complete with \_\_\_\_\_ grating.**

Choose the product code from the dimensions table above.  
Add specification options from Page 10-12.

Choose Grating from page 83-92

**BS EN1253 Loading Class L15 / R50 / M125 / N250 / P400**

This gully can be subjected to very heavy loads but must have the correct heavy duty grating to achieve these loads